



# Entraguard Silver

## Integrated Telephone Entry System

# ENTRAGUARD™ Silver

**Powerful New Feature  
Video TeleTrack™**



- Stand-alone functionality or seamless integration with Keri's access control system and *Doors* software for real access control+telephone entry
- 4-line, large font display
- 750 tenant capacity on all units, customer doesn't pay for extra memory capacity
- Card access for 2 doors can be added by mounting a PXL-500 *Tiger Controller* and SB-593 *Satellite Expansion Board* inside
- Up to 6 digit directory code, up to 15 digit phone numbers
- Networkable to manage multiple doors via RS-485
- Rugged Stainless Steel Enclosure
- Camera, No Phone Line, Hooded Enclosure, Recess-Mount Kit options
- LED lighting, no bulbs to replace

Keri's *Entraguard Silver* telephone entry unit provides 750 tenant capacity with a large-font, 4-line display in an attractive housing that can also contain a PXL-500 *Tiger Controller* and SB-593 *Satellite Expansion Board* for up to two doors of built-in card access. Like the *Entraguard Titanium* and *Entraguard Platinum*, this new unit provides the best telephone entry/access control marriage available by letting the *Entraguard* function as a node on a PXL controller network and putting both functions under the acclaimed *Doors* software umbrella. Additionally, this integration now brings the added benefit of integrated digital video and a powerful new feature, *Video TeleTrack* (in conjunction with Keri's *Visions* Digital Video system), whereby an Operator can view a historical video report of any vehicle at the gate, associated with the tenant who granted access — **On Demand!**

The rugged, stainless steel housing will stand up to the harshest conditions, and the keypad is lit by LEDs, so there are no incandescent bulbs to replace. Each *Entraguard Silver* also has two extra relay outputs that can be used in a variety of ways, including turning on a lobby light, unlocking an interior door, etc., by tone commands from the tenant's location or based on an access granted decision. An on-board modem is also included for remote programming.



1530 Old Oakland Road, Suite 100  
San Jose, CA 95112 USA  
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309  
e-mail: sales@kerisys.com web: www.kerisys.com

Data Sheet

Entraguard Silver  
Integrated Telephone Entry System

# Entraguard Silver

## Integrated Telephone Entry System

### Standard Keypad

- High quality, waterproof-rated keypad (IP-65 rating)

### Real Integrated Access Control

- Telephone unit connects to a Keri access control network
- All features and functions of Keri's acclaimed *Doors* software
- PC programmable
- 32 time zones, auto lock and unlock feature, unlimited access groups
- 3 Holiday schedules
- 3,600 event buffer
- Comprehensive reports
- *Doors* software available in French, Italian, Spanish, and other languages

### Three 80 Character Programmable Scrolling Messages for 4-Line Electronic Display

- Automatic message rotation, programmable cycle time

### "Do Not Disturb" Feature

- Programmable per tenant by using time zones

### "Do Not Display" Tenant Name Function

- Selectable on a per tenant basis

### On-Board Modem Can Be Used For Programming and Calling Telephone Entry Unit


### Two Extra Programmable Relays to Control Other Points

### Up to 6 Digit Directory Code Length

### Shared Capacity of up to 6 Units on One Telephone Line

### Remote Programming via Built-In Modem

- Fast, does not require connection to each unit on the line, uses RS-485 system networking

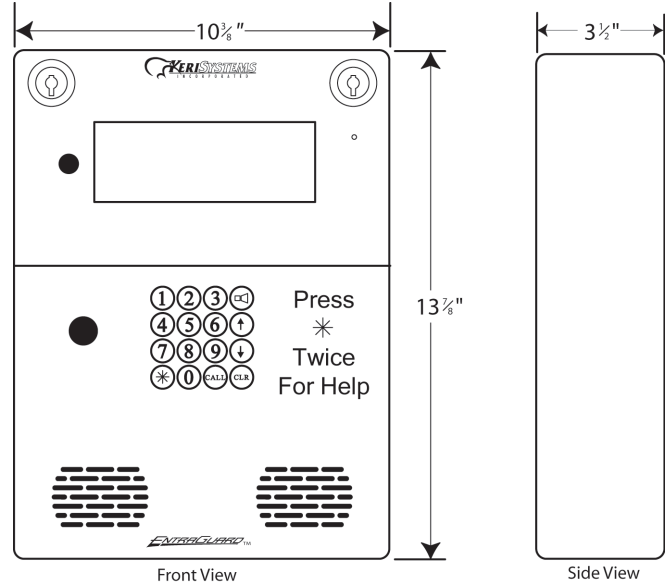

When using *Entraguard* products in a dial-up application, Keri requires the use of an approved modem. Please refer to the Recommend Peripherals list on the web site or call Keri customer service.

#### General Features:

- Surface or recess mount
  - Weather and vandal resistant
  - Postal lock provision
  - Non-volatile memory
  - Built-in surge protection plus surge protection kit
  - Programmable talk time
  - Door forced open and door held open alarms
  - Tone dialing
  - Adjustable volume control
  - Maintenance free
  - LED lighting
  - Mylar speaker with superior sound
  - *Video TeleTrack*\*
- \* Requires Keri's *Visions* Digital Video system.

#### Specifications\*:

- Capacity: Up to 750 Tenants
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays
- Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC @ 1 A
- Size: 13.88" H x 10.34" W x 3.5" D (35.3 cm x 26.3 cm x 8.9 cm)
- Weight: 12.00 lbs (5.44 kg)
- Material: 14 gauge stainless steel
- Warranty: 2 years
- Finish: Brushed Stainless Steel

\* Specifications subject to change without notice.

#### Options:

- No Phone Line
- Camera or Postal Lock out
- Hooded Enclosure or Recess-Mount Kit
- Heater (for operation below 5° F/-15° C)

Trademarks are the property of their respective owners.

P/N: 01751-001



(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309  
e-mail: sales@kerisys.com web: www.kerisys.com

Presented By:

