



Entraguard Titanium

Integrated Telephone Entry System

ENTRAGUARD™ Titanium

**Powerful New Feature
Video TeleTrack™**



- Stand-alone functionality or seamless integration with Keri's access control system and *Doors* software for real access control+telephone entry
- 4-line, 20-character per line, soft, white supertwist LCD display, with up to three programmable scrolling messages
- 750 tenant capacity on all units, customer doesn't pay for extra memory capacity
- Up to 6 digit directory code, up to 15 digit phone numbers
- Networkable to manage multiple doors via RS-485
- Rugged Stainless Steel Enclosure
- Built in hood
- Camera, No Phone Line, Recess-Mount Kit options
- LED lighting, no bulbs to replace

The *Entraguard Titanium* represents a breakthrough in telephone entry by providing 750 tenant capacity with a 4-line LCD display in a small, attractive package, all at an extremely low price. The small footprint allows it to be mounted almost anywhere, and its rugged stainless steel enclosure with built-in hood is designed to withstand the toughest environments. Each *Titanium* can be programmed with three rotating messages for display. Also, this integration now brings the added benefit of integrated digital video and a powerful new feature, *Video TeleTrack* (in conjunction with Keri's *Visions* Digital Video system), whereby an Operator can view a historical video report of any vehicle at the gate, associated with the tenant who granted access — **On Demand!**

Like its sister products, the *Entraguard Gold*, *Silver*, and *Platinum*, the *Titanium* provides the best telephone entry/access control marriage by letting the Entraguard function as a node on a PXL controller network and putting both functions under the acclaimed **Doors** software umbrella. Each *Entraguard Titanium* also has two extra relay outputs that can be used in a variety of ways, including turning on a lobby light, unlocking an interior door, etc., by tone commands from the tenant's location or based on an access granted decision. An on-board modem is also included for remote programming.



1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com

Data Sheet

Entraguard Titanium
Integrated Telephone Entry System

Entraguard Titanium

Integrated Telephone Entry System

Standard Keypad

- High quality, waterproof-rated keypad (IP-65 rating)

Real Integrated Access Control

- Telephone unit connects to a Keri access control network
- All features and functions of Keri's acclaimed *Doors* software
- PC programmable
- 32 time zones, auto lock and unlock feature, unlimited access groups
- 3 Holiday schedules
- 3,600 event buffer
- Comprehensive reports
- Doors software available in French, Italian, Spanish, and other languages

Three 80 Character Programmable Scrolling Messages for 4-Line Electronic Display

- Automatic message rotation, programmable cycle time

"Do Not Disturb" Feature

- Programmable per tenant by using time zones

"Do Not Display" Tenant Name Function

- Selectable on a per tenant basis

On-Board Modem Can Be Used For Programming and Calling Telephone Entry Unit


Two Extra Programmable Relays to Control Other Points

Up to 6 Digit Directory Code Length

Shared Capacity of up to 6 Units on One Telephone Line

Remote Programming via Built-In Modem

- Fast, does not require connection to each unit on the line, uses RS-485 system networking

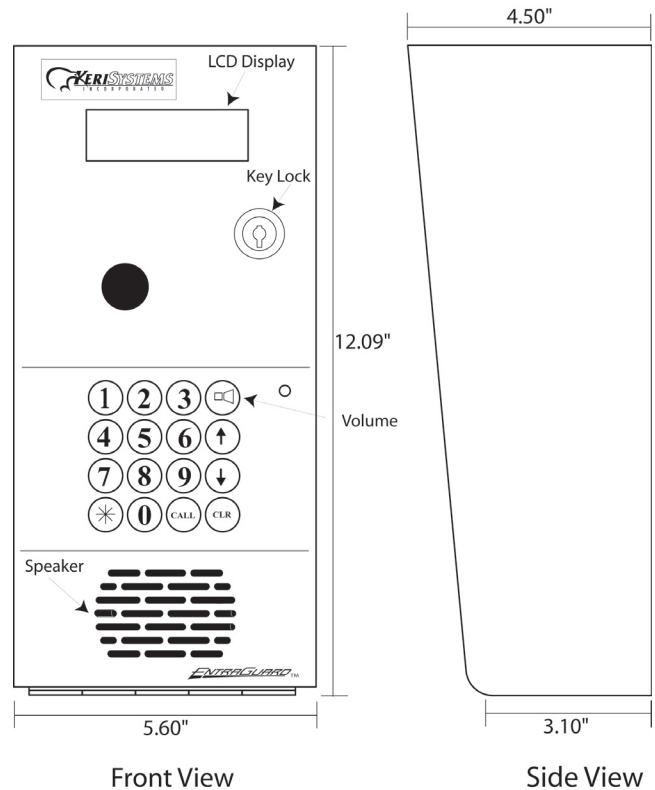

When using Entraguard products in a dial-up application, Keri requires the use of an approved modem. Please refer to the Recommend Peripherals list on the web site or call Keri customer service.

General Features:

- Surface or recess mount
 - Weather and vandal resistant
 - Postal lock provision
 - Non-volatile memory
 - Built-in surge protection plus surge protection kit
 - Programmable talk time
 - Door forced open and door held open alarms
 - Tone dialing
 - Adjustable volume control
 - Maintenance free
 - LED lighting
 - Mylar speaker with superior sound
 - *Video TeleTrack**
- * Requires Keri's *Visions* Digital Video system.

Specifications*:

- Capacity: Up to 750 Tenants
 - Outputs: Door Relay, Alarm Relay, 2 additional programmable relays
 - Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
 - Input Power: 12 VDC @ 1 A
 - Size: 12.07" H x 5.58" W x 4.525" D (30.7 cm x 14.2 cm x 11.5 cm)
 - Weight: 7.05 lbs (3.20 kg)
 - Material: 14 gauge stainless steel
 - Warranty: 2 years
 - Finish: Brushed Stainless Steel
- * Specifications subject to change without notice.

Options:

- No Phone Line
- Camera or Postal Lock out
- Recess mount kit
- Heater (for operation below 5° F/-15° C)

Trademarks are the property of their respective owners.

P/N: 01753-002



(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
 e-mail: sales@kerisys.com web: www.kerisys.com

Presented By:

